


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	5	ADDED SPEC TABLE AND PART NUMBER	10/16/2020	DM


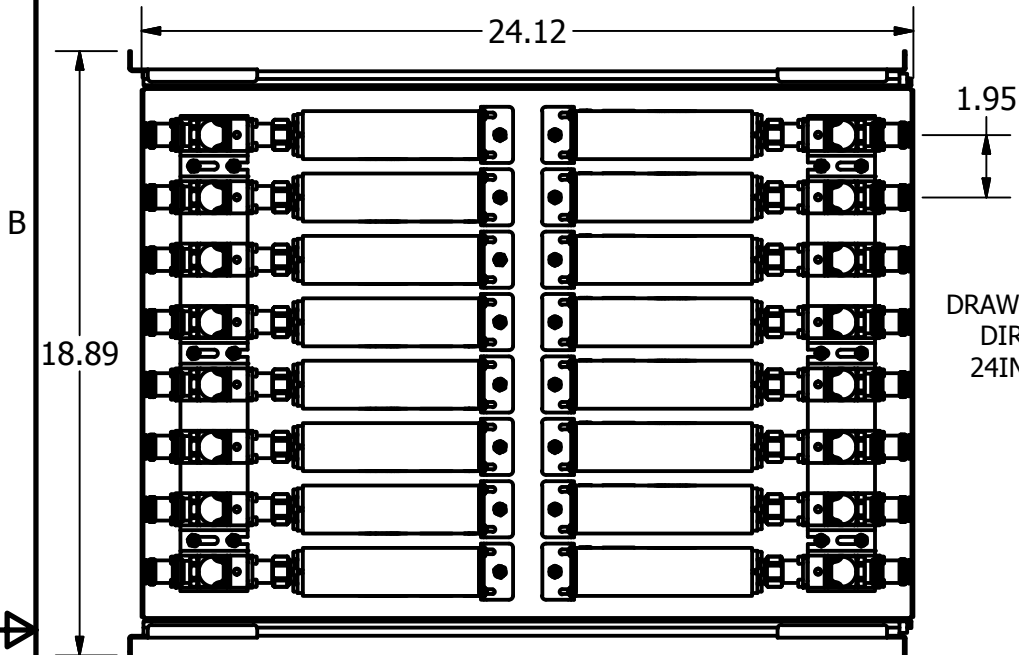


SPECIFICATION:

FREQUENCY:	600 - 6000 MHz					
ATTENUATION (dB):	20	25	30	33	35	40
COUPLING ACCURACY (dB)						
600-698 MHz:	±0.5	±2.0	±2.0	±2.0	±2.0	±3.0
698-960 MHz:	±0.5	±2.0	±2.0	±2.0	±2.0	±3.0
1700-2700 MHz:	±0.5	±2.0	±2.0	±2.0	±2.0	±3.0
3400-3800 MHz:	±0.5	±2.0	±2.0	N/A	N/A	N/A
4200-6000 MHz:	±0.75	±3.0	±3.0	N/A	N/A	N/A
RETURN LOSS (dB)						
600-3800 MHz:	25	23	23	20	20	20
4200-6000 MHz:	18	17	17	N/A	N/A	N/A
PIM (dBc):	155 dBc @ 2x20 W					
POWER (W):	20 W					
CONNECTORS:	4.3-10 FEMALE INPUT/OUTPUT					
NUMBER OF CHANNELS:	16					

ADJUSTABLE 26 TO 20 INCHES

4.3-10 FEMALE OUTPUT,
FACING TOWARDS INPUT

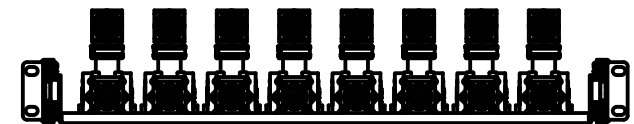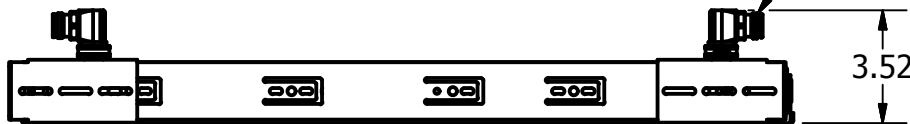

PROPERTY OF R&D MICROWAVES LLC

PART NUMBER:

DAS-B28A-XXD43

CONNECTORS FACE OPPOSITE SIDES

ATTENUATION VALUE

CONNECTOR TYPE

DRAWN	mclaughlind	3/6/2020
CHECKED		
QA		
MFG		
APPROVED		



R&D Microwaves LLC, USA

TITLE
DAS-B28A-XXD43: 16 CHANNEL ATTENUATOR SLIDING TRAY, CONNECTORS FACING OPPOSITE SIDES

SIZE	DWG NO		REV
A	DAS-B28A-XXD43-OLrev5		5
SCALE	SHEET		OF
1 : 6	1		1